





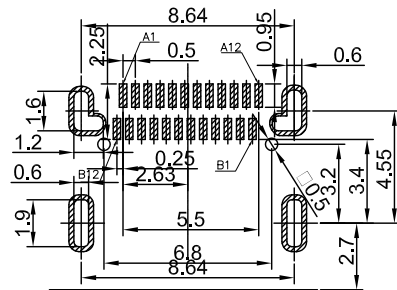


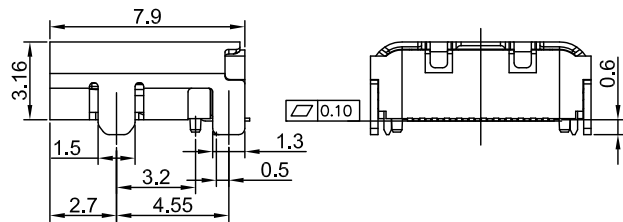

- NOTE:
- 1.OPEN/SHORT TEST:100%;
 - 2.CONDUCTOR RESISTANCE:5Ω;
 - 3.INSULATION RESISTANCE:20MΩ;
 - 4.HI-POT TEST:300V/DC;
 - 5.ALL MATERIALS MUST ACCORD WITH RoHS;

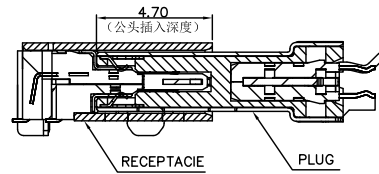

CUSTOMER DRAWING

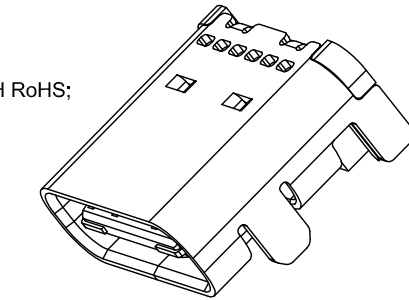

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm


A1	GND	B12	GND
A2	SSTXP1	B11	SSRXN1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXN2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- 包装说明:
- 1.将检验好的成品;SMT朝下放入载带底部;每卷装800PCS产品;8000PCS/箱;具体如图一所示
 - 2.将包装好的产品;每盘卷叠贴上内标签;具体如图二所示
 - 3.将贴好内标签的产品每10盘叠一层装入防水袋中并加一包干燥剂;装好后将防水袋封好;具体如图三图四所示
 - 4.先将1pcs平卡放入纸箱底部;然后将装好产品的防水袋装入纸箱中;防水袋热熔封口;封口面需朝上;并将4PCS三角套分别装入4个角;如图五所示
 - 5.装好后将1pcs平卡放入纸箱最上面并封好纸箱及贴好相关标签;具体如图六所示;
 - 6.载带前面留30PCS空格,后面留20PCS空格
 7. COVER与CARRY剥离力:50~125g,速度:300mm/分钟左右,剥离角度:165°~180°

备注:

- 1.材质:
 - 1.1 胶芯: LCP+30%G.F UL94V-0
 - 1.2 端子: COPPER ALLOY;
 - 1.3 外壳: SUS304, T=0.30mm; 表面镀镍100 μ"
 - 1.4 护板: 不锈钢, T=0.15mm;
- 2.主要特性:
 - 2.1 额定电流: 3A MIN FOR VBUS, 0.25A MIN FOR OTHER.
 - 2.2 接触阻抗: 40mΩ MAX
 - 2.3 绝缘阻抗: 100MΩ MIN 250V DC
 - 2.4 耐压测试: 100V AC
 - 2.5 沾锡性: 温度250±5℃, 时间5±0.5s
 - 2.6 整体插入力: 2.00kgf MAX
整体拔出力: 0.80kgf MIN
 - 2.7 使用寿命: 10000 次
 - 2.8 工作温度: -55℃~+85℃

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A		NEW	04/27/2016	JOHNSON

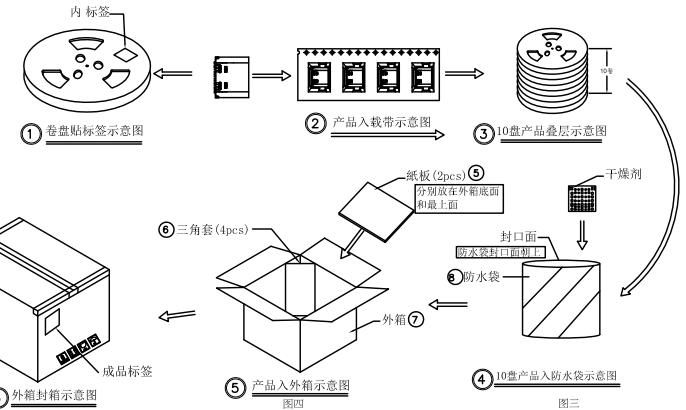

S

T50E7322

X

XX

X

0ET

CONTACT PLATING

0=G/F

1=2~3U

2= 5U

3=10u

4=15u

5=30u

PACKING OPTION

0=TAPE & Reel Packing

1=Tube Packing

2=Tray packing

SPECIAL OPTION


00=黑膠芯+ PCB (3A5V)+無線夾

01=黑膠芯+ PCB (3A5V)+帶線夾 (U2 28#+28#)

02=黑膠芯+ PCB (3A5V)+帶線夾 (U2 30#+28#+32#)

03=黑膠芯+ PCB (3A5V)+帶線夾 (U3.1 32#+32#+23#)

04=黑膠芯+ PCB (3A5V)+帶線夾 (U3.1 30#+34#+23#)

TOLERANCE UNIT (mm)		APPROVALS		DATE		TC&C Electronics Co.,Ltd							
X.	±0.30	DRAWN WINKI		06/20/2016		TITLE USB 3.1 C FEMALE(雙排貼/24PIN)							
X.X	±0.25	CHECKED JOHNSON		06/20/2016									
X.XX	±0.15	APPROVED JOHNSON		06/20/2016									
X.XXX	±0.08												
ANGULAR ±2°						SCALE N.A.		PART NO.		DRAWING NO.		REV.	
						SHEET 1 OF 1		T50E7322XXXX0ET		T50E7322XXXX0ET A		A	
UNLESS OTHERWISE SPECIFIED				UNIT MM		CUSTOMER CODE				CUSTOMER PART NO.			