

Model H-400M 面積式流量計


VARIABLE AREA TYPE FLOW METER

Model H-400M

光纖開關

REED SWITCH

PURGE METER

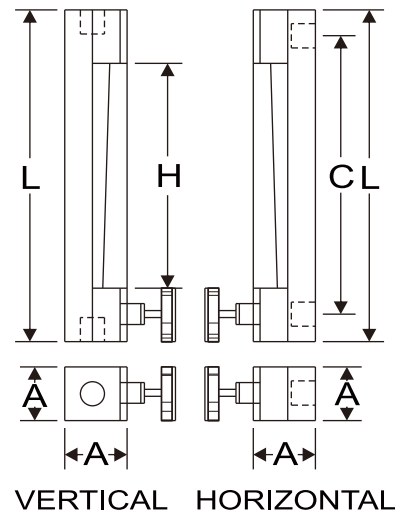

DIMENSIONS

MODEL	6	10	15	18	20	25	32	40
L	182	182	220	230	315	315	340	340
H	130	130	160	160	190	190	210	210
C	158	158	190	193	250	250	310	301
AØ	28	28	34	40	46	53	76	86
P	1/4	1/4	1/2	1/2	3/4	1	1 1/4	1 1/2

SPECIFICATIONS

Model	MS	MW	MX	MV	MP	MC	MD	GLASS	PC
Max.Temp	100°C			60°C	70°C	90°C	120°C	100°C	
Max. Press	10kg/cm²G			6kg/cm²G				4-6 kg	6-12 kg
Accuracy	WATER ± 3% F.S					AIR ± 4% F.S			

ORDERING INFORMATION

Body Material	Connection Type	In-Out Direction	Tube Material	Float Material
S SS304	A FPT	H Horizontal	G GLASS	S SS304
W SS316	B FNPT	V Vertical	P PC	W SS316
V P.V.C	O OTHER			V P.V.C
P P.P				P P.P
D P.V.D.F				D P.V.D.F
X SS316L				X SS316L
C C.P.V.C				C C.P.V.C

Seal Material	Connection Size	Alarm Switch
N NEOPRENE	6 1/4" 25 1"	N NONE
V VITON	10 1/4" 32 1 1/4"	H HI
T TEFLON	15 1/2" 40 1 1/2"	L LO
	20 3/4" 50 2"	A HI LO

Tube Size	Normal Flow Range			
	WATER	L/MIN	AIR	NL/MIN
6	0.01-0.1	0.03-0.3	0.1-1	0.3-3.
	0.02-0.2	0.04-0.4	0.2-2	0.4-4
10	0.03-0.3	0.08-0.8	0.5-5.0	1-15
	0.05-0.5	0.1-1.0	1-10	2-20
15	0.1-1.0	0.3-3.0	3-30	6-60
	0.2-2.0	0.4-4.0	5-50	8-80
18	0.5-5.0	1-10	10-100	20-200
	0.6-6.0	1-15	15-150	25-250
20	1-10	2-20	20-200	30-300
	1-15	3-30	25-250	50-500
25	3-30	5-50	50-500	100-1000
	4-40	8-80	80-800	150-1500
32	5-50	10-100	150-1500	250-2500
	8-80	12-120	200-2000	300-3000
40	15-150	25-250	250-2500	350-3500
	20-200	30-300	300-3000	400-4000
50	30-300	50-500	350-3500	450-4500
	40-400	60-600	400-4000	500-5000

H-400M S-20 A H-G S N-20-N

Body
Tube Size
Conn. Type
In-Out

Alarm
Conn. Size
Seal
Float
Tube

NOTE: (1)各尺寸流量，均可以依客戶需求訂製

(2)MS,MW,MX` 只製作到 1"(25)

(3)MV,MD,MP,MC 沒有針閥