

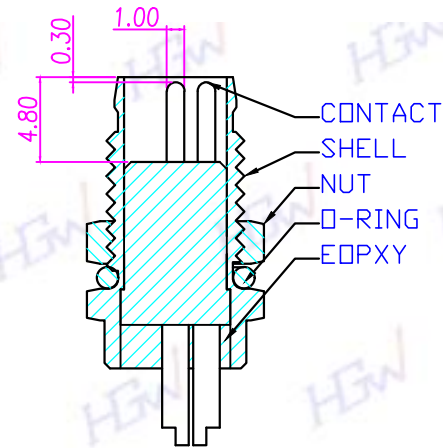
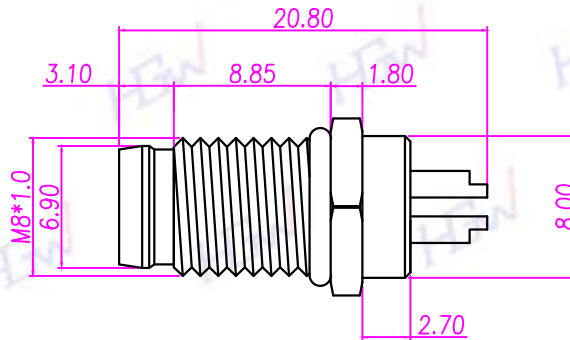






禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		170504



1.MATERIAL

- 1-1.HOUSING: PBT ; COLOR: BLACK
- 1-2.CONTACT: BRASS
- 1-3.SHELL: BRASS
- 1-4.O-RING: NBR ; COLOR: BLACK
- 1-5.NUT: BRASS

2.FINISH

- 2-1.CONTACT: 10 MICRO INCHES MIN. GOLD PLATING
- 2-2.SHELL: NICKEL PLATED
- 2-3.NUT: NICKEL PLATED

3.ELECTRICAL CURRENT

- 3-1.RATED CURRENT: 4A
- 3-2.RATED VOLTAGE: 60V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -20°C~85°C

客戶圖面確認簽回章

TITLE
M8(M)前鎖板焊線式(M8*1.0)


P/N: SEE TABLE A

DWG. NO: QC5403

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIFIED TOLERANCES:
X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE ± 1°
REV. A SHEET 1/1

HGM2-M804P-64	防水頭 4P (M) 前鎖板M8*1.0 焊線式				
HGM2-M803P-22	防水頭 3P (M) 前鎖板M8*1.0 焊線式				
HGM2-M802P-62-11	防水頭 2P (M) 前鎖板M8*1.0 焊線式				
HGM2-M802P-19	防水頭 2P (M) 前鎖板M8*1.0 焊線式				
P/N	DESCRIPTION	HGM2-M804P-64	HGM2-M803P-22	HGM2-M802P-19	HGM2-M802P-62-11