




REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
AX1			9/08/2006	Joan




SECTION A-A







SECTION B-B



SECTION C-C

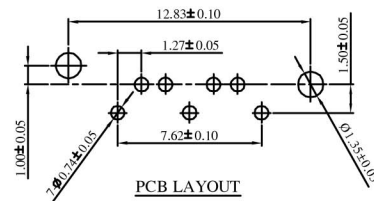

PCB LAYOUT

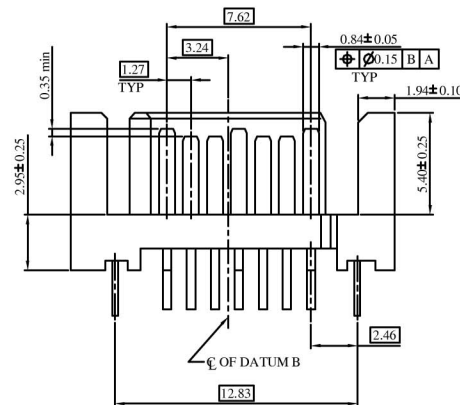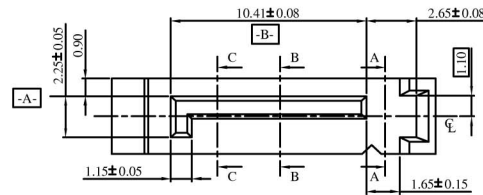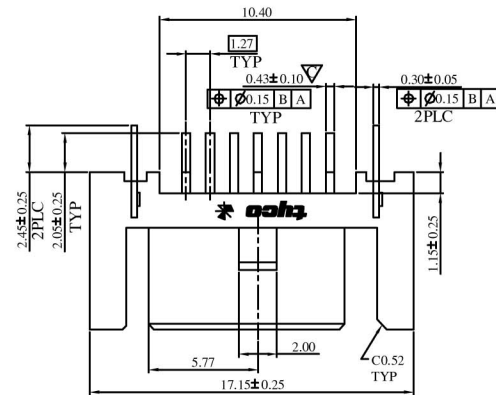

SPECIFICATION:
 1.MATERIAL:
 HOUSING:PBT(TV4 260 SF)30% GLASS FIBRE REINFORCED
 COLOR:BLACK
 CONTACT:BRASS C2680R E_H T=0.25mm
 PEG: BRASS C2680R H,T=0.30mm
 2.FINISH:
 CONTACT: 15u" GOLD/TIN PLATING ON CONTACT AREA
 100u" MIN. TIN-LEAD PLATING ON SOLDER TAILS
 50u" MIN.NICKEL UNDERPLATING OVER ALL
 PEG: 100u" MIN. TIN-LEAD PLATING ON SOLDER TAILS
 50u" MIN.NICKEL UNDERPLATING OVER ALL



TOLERANCE UNIT(mm)		APPROVALS		DATE		TC&C Electronics Co.,Ltd						
X.	±0.38	DRAWN Joan		9/08/2006		TITLE SATA 7P板端180度B型雙導槽						
X.X	±0.25	CHECKED Tank Lee		9/08/2006								
X.XX	±0.15	APPROVED Johnson		9/08/2006								
X.XXX	±0.08					SCALE N.A.		PART NO.		DRAWING NO.		REV.
ANGULAR	±2°					SHEET 1 OF 1		T504841125214U4		SATA-1061A2		AX0
UNLESS OTHERWISE SPECIFIED				UNIT MM		CUSTOMER CODE				CUSTOMER PART NO.		