

# Preliminary

## LL-U26Z3C-007


### DATA SHEET

QC:

ENG:

Prepared By:

## Package Dimensions:

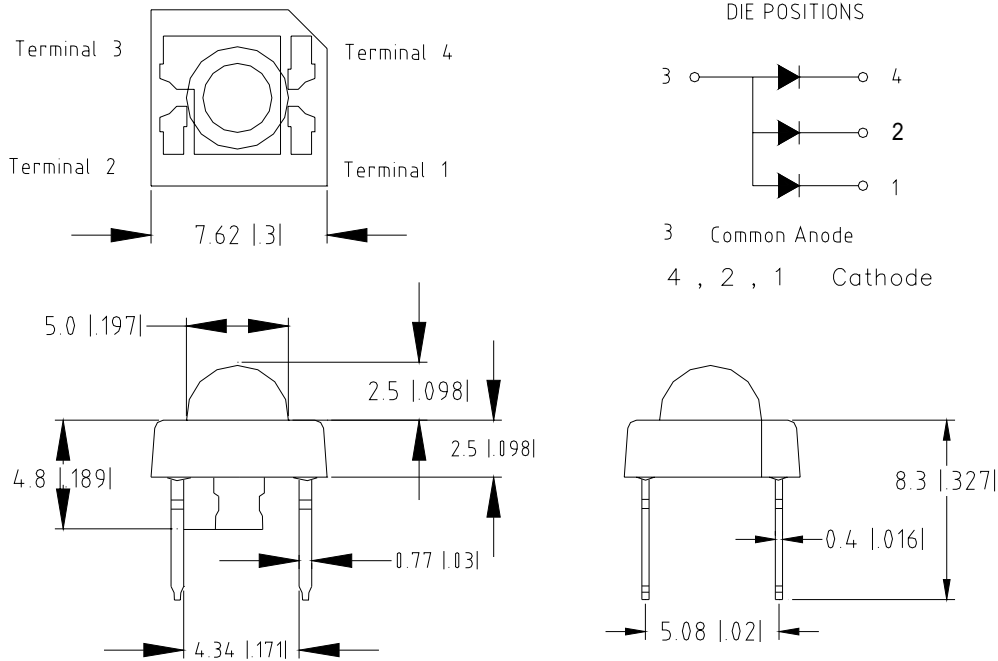

Part NO.	Chip Material	Lens Color	Source Color
LL-U26Z3C-007	InGaN	Water Clear	Super Bright True Green

### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25\text{mm}$  (.010") unless otherwise noted.
3. Protruded resin under flange is 1.0mm (.04") max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.
6. Precautions for ESD:  
Static electricity and surge can damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.
7. This data-sheet only valid for six months.

**Absolute Maximum Ratings at Ta=25**

Parameter	MAX.	Unit
Power Dissipation (Per Chip)	120	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width) (Per Chip)	100	mA
Continuous Forward Current(Per Chip)	30	mA
Derating Linear From 50	0.4	mA/
Reverse Voltage(Per Chip)	5	V
Operating Temperature Range	-30 to +80	
Storage Temperature Range	-40 to +100	
Lead Soldering Temperature [4mm(.157") From Body]	260 for 5 Seconds	

**Electrical Optical Characteristics at Ta=25**


Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	$I_v$	1500	3500	---	mcd	$I_f=20\text{mA}$ (Note 1)
Viewing Angle(Per Chip)	$2\theta_{1/2}$	65	75	85	Deg	(Note 2)
Peak Emission Wavelength	$\lambda_p$	520	525	530	nm	$I_f=20\text{mA}$
Dominant Wavelength	$\lambda_d$	520	530	540	nm	$I_f=20\text{mA}$ (Note 3)
Spectral Line Half-Width	$\lambda$	30	35	40	nm	$I_f=20\text{mA}$
Forward Voltage(Per Chip)	$V_f$	2.8	3.2	4.0	V	$I_f=20\text{mA}$
Reverse Current(Per Chip)	$I_R$	---	---	100	$\mu\text{A}$	$V_R=5\text{V}$

**Notes:**


1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2.  $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity
3. The dominant wavelength ( $\lambda_d$ ) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

**Typical Electrical / Optical Characteristics Curves**  
 (25 Ambient Temperature Unless Otherwise Noted)


**Spectral Radiance (Peak @ 525 nm)**

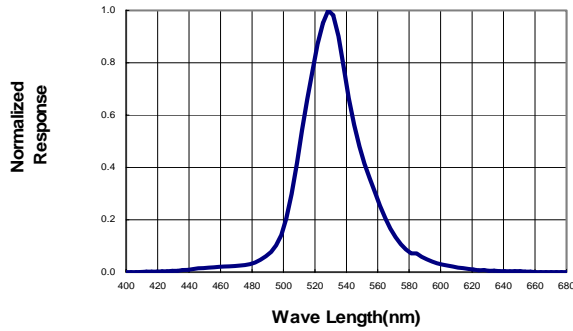

**Forward Current vs Forward Voltage**

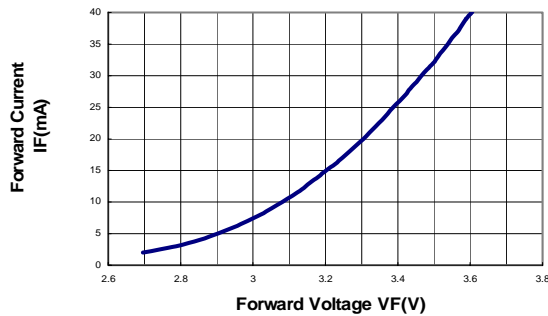

**Relative Luminous Intensity vs Forward Current**

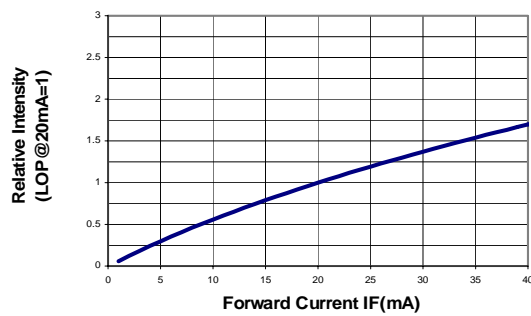

**Beam Pattern**

