




TABLE A




HGF2-DS04P-206-11



HGF2-DS05P-161-11



HGF2-DS07P-13-11

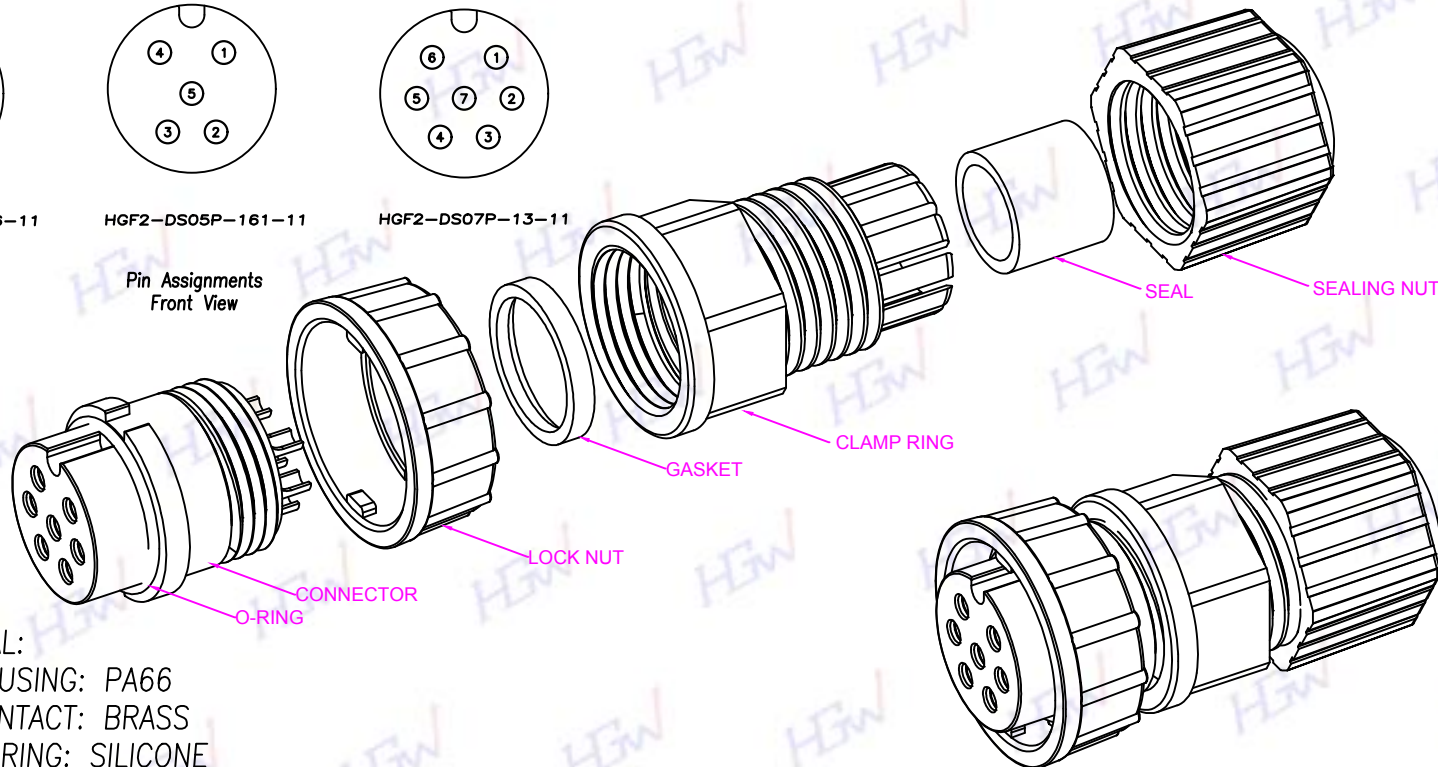Pin Assignments
Front View

1.MATERIAL:

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.O-RING: SILICONE
- 1-4.LOCK NUT: PA66
- 1-5.GASKET: SILICONE
- 1-6.CLAMP RING: PA66
- 1-7.SEAL: SILICONE
- SEAL FOR CABLE: OD ϕ 5.5mm~10.8mm
- 1-8.SEALING NUT: PA66

2.FINISH:



- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 20A
- 3-2.RATED VOLTAGE: 300V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C

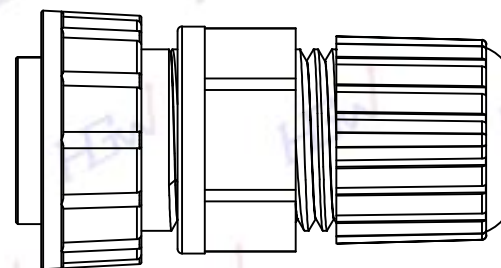

禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		181130

客戶圖面確認簽回章

TITLE
D SIZE(F/F)ASSEMBLY-20A

P/N: SEE TABLE A

DWG. NO: QC8836

DR. Dan		UNIT: mm
---------	--	----------

CH. Jason	SCALE	1:1
-----------	-------	-----

AP. Lanny	UNLESS OTHERWISE SPECIFIED TOLERANCES:	
REV. A	SHEET 1/1	X ± 0.20 XXX ± 0.05 XX ± 0.10 ANGLE $\pm 1^\circ$