

LED 投光燈

100W



200W



300W



400W



應用

體育館/場照明
高桿燈照明
建築物外觀照明
廣告看板照明
工廠照明
停車場照明



色溫5000K

(可選配 100~200Vac)


產品型號	模組數	LED 品牌	演色性	瓦數	輸入功率 (W)	光效 (每瓦流明)	光通量 (流明)	輸入電壓
LS410CP-0	1	CREE	70 Minimum	100W	98.5	100	9830	200~277Vac
LS410N9-0	1	NICHIA	70 Minimum	100W	97.5	132	12870	200~277Vac
LS420C9-0	2	CREE	70 Minimum	200W	197	100	19660	200~277Vac
LS420N9-0	2	NICHIA	70 Minimum	200W	195	132	25740	200~277Vac
LS430CP-0	3	CREE	70 Minimum	300W	295.5	100	29490	200~277Vac
LS430N9-0	3	NICHIA	70 Minimum	300W	292.5	132	38610	200~277Vac
LS440CP-3	4	CREE	70 Minimum	400W	394	100	39320	200~277Vac
LS440N9-3	4	NICHIA	70 Minimum	400W	390	132	51480	200~277Vac

色溫3000K


(可選配 100~200Vac)

產品型號	模組數	LED 品牌	演色性	瓦數	輸入功率 (W)	光效 (每瓦流明)	光通量 (流明)	輸入電壓
LS410CR-0	1	CREE	80 typical	100W	98.5	89	8720	200~277Vac
LS410NA-0	1	NICHIA	70 Minimum	100W	97.5	121	11800	200~277Vac
LS420CR-0	2	CREE	80 typical	200W	197	89	17440	200~277Vac
LS420NA-0	2	NICHIA	70 Minimum	200W	195	121	23600	200~277Vac
LS430CR-0	3	CREE	80 typical	300W	295.5	89	26160	200~277Vac
LS430NA-0	3	NICHIA	70 Minimum	300W	292.5	121	35400	200~277Vac
LS440CR-3	4	CREE	80 typical	400W	394	89	34880	200~277Vac
LS440NA-3	4	NICHIA	70 Minimum	400W	390	121	47200	200~277Vac


100W尺寸圖

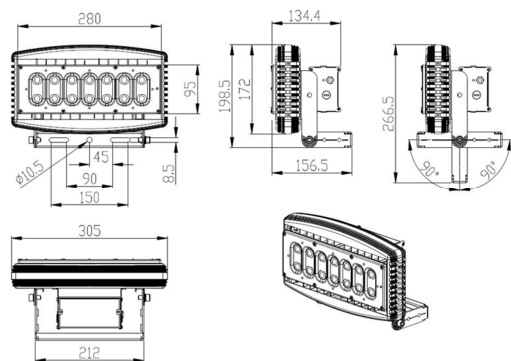

200W尺寸圖

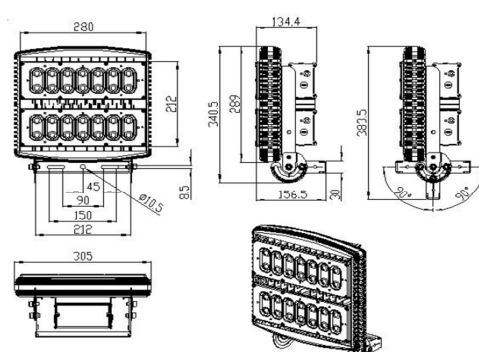

300W尺寸圖

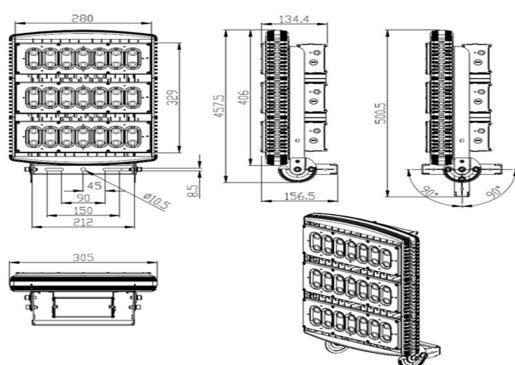

400W尺寸圖

