
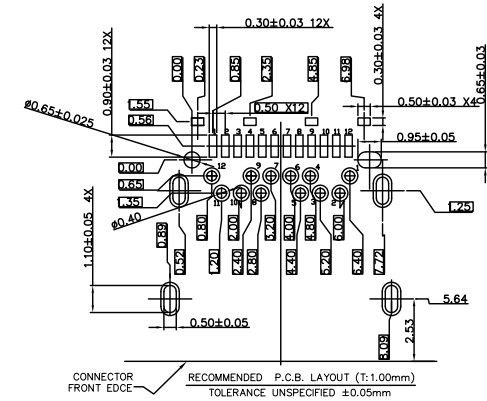



CUSTOMER DRAWING

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A		NEW	04/27/2016	JOHNSON

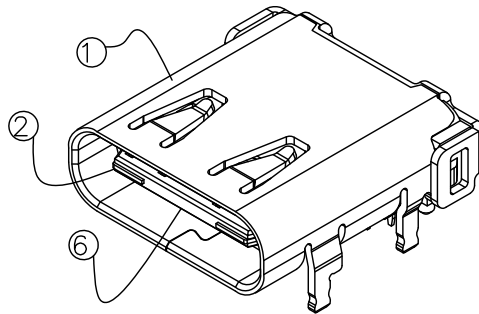

1	THERMOPLASTIC UL94V-0	DIP HOUSING	①
1	THERMOPLASTIC UL94V-0	SMT HOUSING	②
1	THERMOPLASTIC UL94V-0	LATCH HOUSING	③
12	COPPER ALLOY	DIP CONNECTOR	④
12	COPPER ALLOY	SMT CONNECTOR	⑤
2	SUS	EMI	⑥
1	SUS	LATCH	⑦
1	SUS	SHELL	⑧
QTY'S	MATERIAL	NAME	NO.

SPECIFICATIONS:

- MECHANICAL :
 - INSERTION FORCE : 5N~20N
 - WITHDRAWAL FORCE : 8N~20N
AFTER 10,000 CYCLES MATING: 2N MIN.
- ELECTRICAL :
 - CONTACT CURRENT RATING: 3A
 - VOLTAGE RATING : 30V AC (rms)
 - WITHSTANDING VOLTAGE: 100 VAC FOR 1 MINUTE.
INSULATION RESISTANCE: 100 MEGAOHMS MIN.
 - CONTACT RESISTANCE: 40 MILLIOHMS MAX.
- ENVIRONMENTAL :
 - OPERATING TEMPERATURE: -25°C TO +85°C





T50E7222 X 05 X 0ET

CONTACT PLATING

0=G/F
1=2~3U
2= 5U
3=10u
4=15u
5=30u

PACKING OPTION

0=TAPE & Reel Packing
1=Tube Packing
2=Tray packing

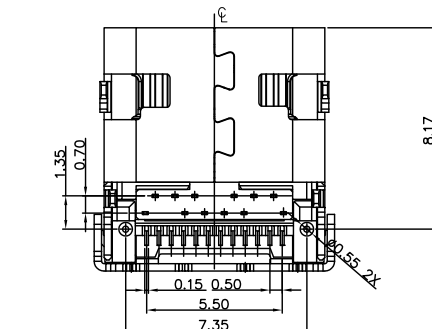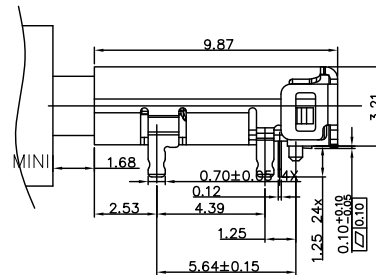

A	B
1 GND	12 GND
2 SSTxp1	11 SSRxp1
3 SSTxn1	10 SSRxn1
4 VBUS	9 VBUS
5 CC1	8 SBU2
6 Dp1	7 Dn2
7 Dn1	6 Dp2
8 SBU1	5 CC2
9 VBUS	4 VBUS
10 SSRxn2	3 SSTxn2
11 SSRxp2	2 SSTxp2
12 GND	1 GND



TOLERANCE UNIT(mm)	APPROVALS	DATE	TC&C Electronics Co.,Ltd			
X. ±0.30	DRAWN WINKI	06/20/2016	TITLE USB 3.1 C FEMALE(DIP/24PIN)			
X.X ±0.25	CHECKED JOHNSON	06/20/2016				
X.XX ±0.15	APPROVED JOHNSON	06/20/2016				
X.XXX ±0.08			SCALE N.A.	PART NO.	DRAWING NO.	REV.
ANGULAR ±2"			SHEET 1 OF 2	T50E7222X05X0ET	T50E7222X05X0ET A	A
UNLESS OTHERWISE SPECIFIED			CUSTOMER CODE	CUSTOMER PART NO.		

A

B

C

D


E

CUSTOMER DRAWING



REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A		NEW	04/27/2016	JOHNSON

包装说明:


1. 将检验好的成品;SMT朝下放入载带底部;每卷装1000PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每7盘叠一层装入防水袋中并加一包干燥剂;装好后将防水袋封好;具体如图三图四所示
4. 先将1pcs平卡放入纸箱底部;然后将装好产品的防水袋装入纸箱中;防水袋热熔封口,封口面需朝上;并将4PCS三角套分别装入4个角;如图五所示
5. 装好后将1pcs平卡放入纸箱最上面并封好纸箱及贴好相关标签;具体如图六所示;(产品包装的标签,如客户有要求,请按客户要求包装出货)
6. 载带前面留30PCS空格,后面留20PCS空格
7. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,剥离角度:165°-180°

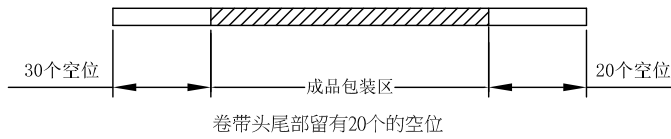


图一

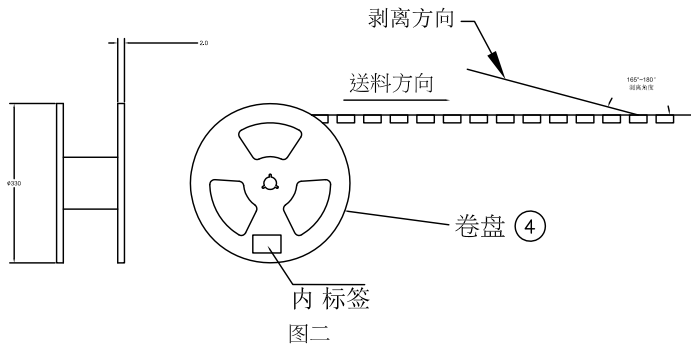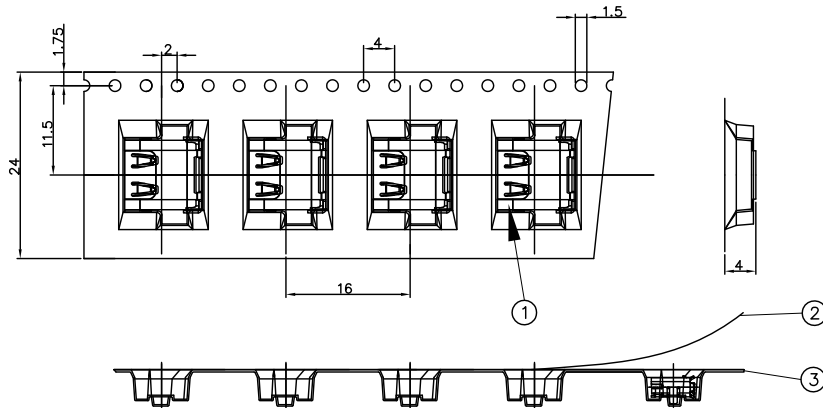


图二

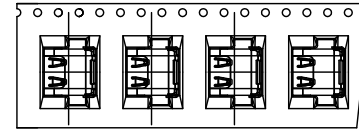

① 产品入载带示意图

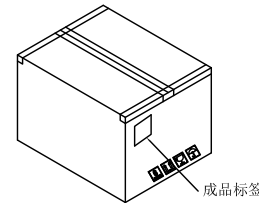

⑥ 外箱封箱示意图

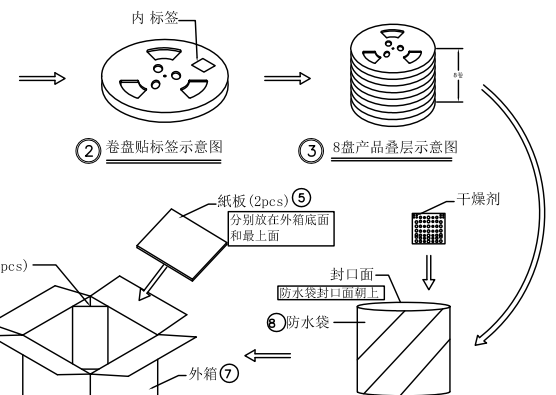

图四

图三

TABLE A

序号	品名	规格	数量
①	USB 3.1 C TYPE FEMALE		7 K
②	包装覆膜	GP PET, W=21.3mm, 热融性	15.2*8m
③	载带	GP PS透明 W=24mm P=16mm T=0.36mm(1卷/15.2m)	15.2*8m
④	卷盘	卷盘330*24.4 (内宽)	7PCS
⑤	纸板	332*332*3mm	2PCS
⑥	三角套	280(80+120+80)*200mm	4PCS
⑦	纸箱	345*345*255mm K=K	1PCS
⑧	防水袋	600*600*0.15	1PCS

TOLERANCE UNIT(mm)		APPROVALS		DATE		TC&C Electronics Co.,Ltd							
X.	±0.30	DRAWN WINKI		06/20/2016		TITLE USB 3.1 C FEMALE(DIP/24PIN)							
X.X	±0.25												
X.XX	±0.15	CHECKED JOHNSON		06/20/2016									
X.XXX	±0.08												
ANGULAR	±2°	APPROVED JOHNSON		06/20/2016		SCALE N.A.		PART NO.		DRAWING NO.		REV.	
UNLESS OTHERWISE SPECIFIED				UNIT MM		SHEET 2 OF 2		T50E7222X05X0ET		T50E7222X05X0ET A		A	
						CUSTOMER CODE		CUSTOMER PART NO.					