






禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		150423

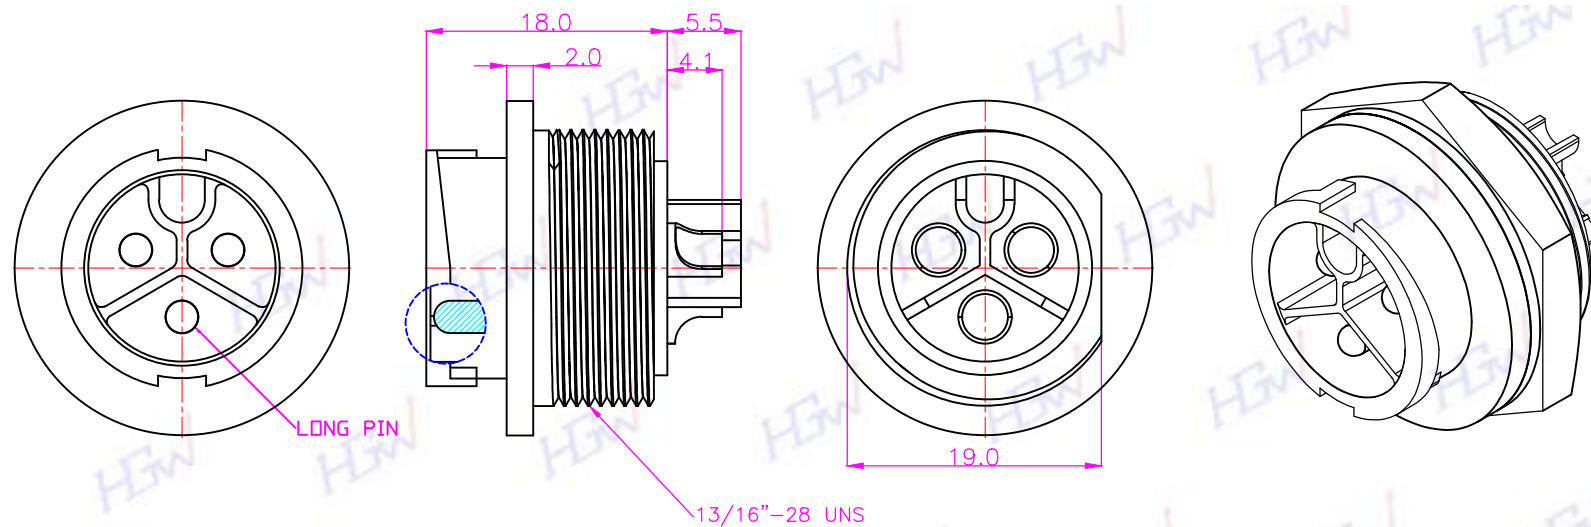

Pin Assignments
Front View

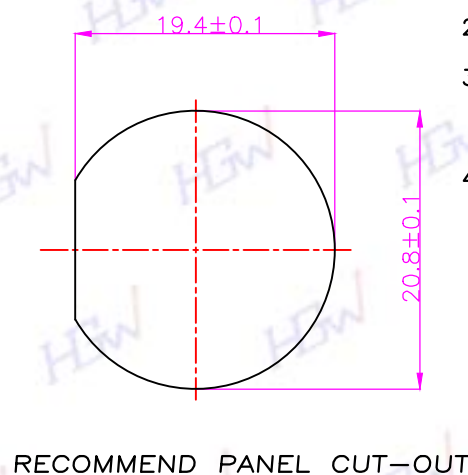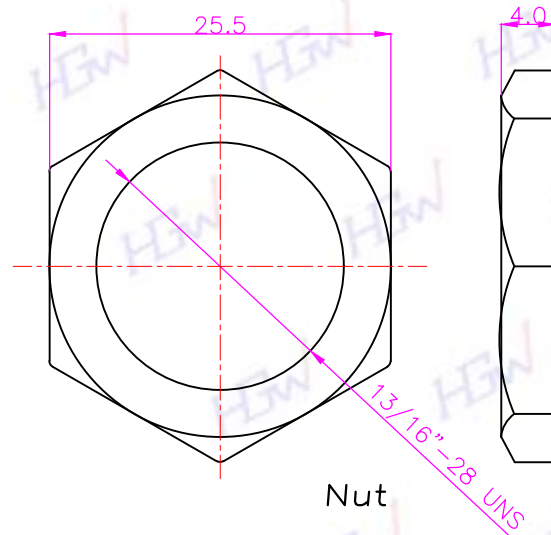

- 1.MATERIAL
1-1.HOUSING: PA66
1-2.CONTACT: BRASS
1-3.NUT: PA66
1-4.GASKET: SILICONE
- 2.FINISH
2-1.CONTACT: GOLD FLASH PLATED
- 3.ELECTRICAL SPECIFICATION
3-1.RATED CURRENT: 20A
3-2.RATED VOLTAGE: 250V
3-3.WATERPROOF: IP67
- 4.ENVIRONMENTAL
4-1.OPERATION TEMPERATURE: -40°C~105°C

客戶確認簽回章

TITLE
C SIZE-3P(M/M)後鎖板母式

P/N: HGM2-CS03P-92-11

DWG. NO: QC8508

DR. Dan  UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE SPECIPED TOLERANCES:
X ± 0.20 XXX ± 0.05
XX ± 0.10 ANGLE $\pm 1^\circ$

REV. A SHEET 1/1