



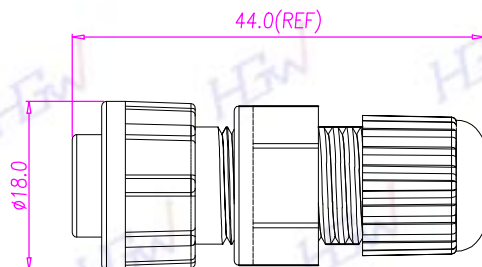


TABLE A

		
2 PIN	3 PIN	4 PIN
HGF2-BS02P-54-11	HGF2-BS03P-96-11	HGF2-BS04P-194-11

PIN ASSIGMENTS
FRONT VIEW

UNMATED IP67

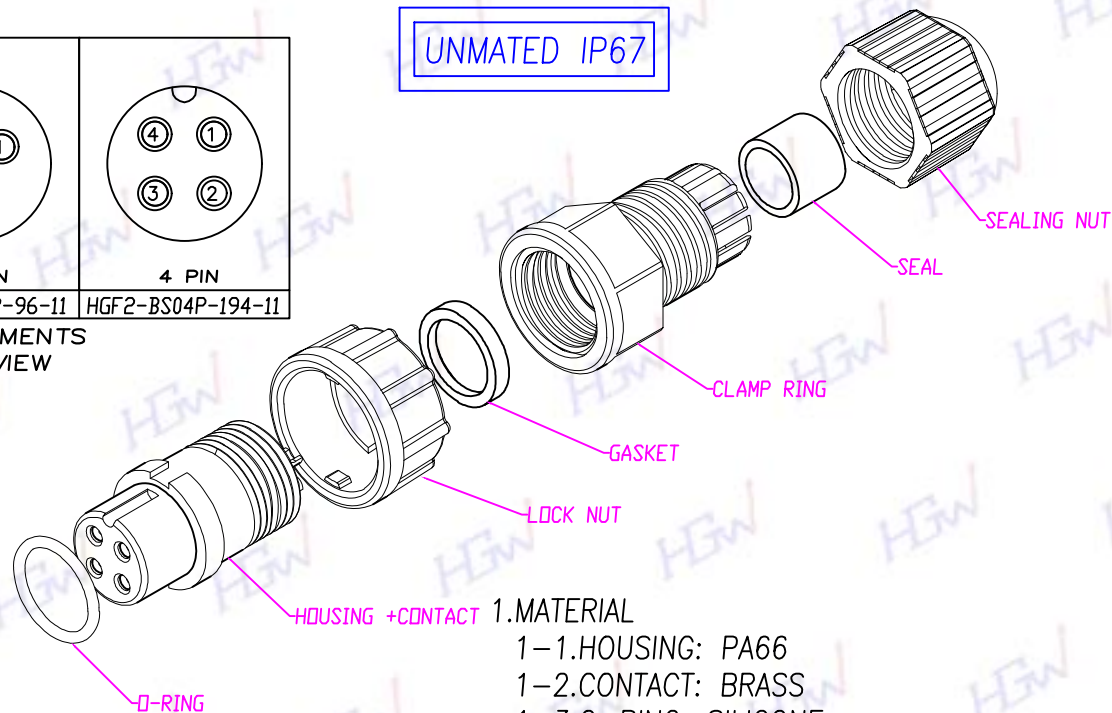

1.MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.O-RING: SILICONE
- 1-4.LOCK NUT: PA66
- 1-5.GASKET: SILIONE
- 1-6.CLAMP RING: PA66
- 1-7.SEAL: SILICONE

CABLE ODØ4.5mm~6.5mm

- 1-8.SEALING NUT: PA66

2.FINISH

- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 10A
- 3-2.RATED VOLTAGE: 250V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180727

Drawing confirmation signature

TITLE B SIZE(F)LOCK TYPE
ASSEMBLY 10A

P/N:

DWG. NO: QC8634

DR. Dan  UNIT: mm

CH. Jason SCALE 1:1

AP. Lanny	UNLESS OTHERWISE SPECIPED TOLERANCES:	
REV. A	SHEET 1/1	X ± 0.20 XXX ± 0.05 XX ± 0.10 ANGLE ± 1°