


TABLE A

HGM2-BS06P-64-11	HGM2-BS07P-21-11	HGM2-BS08P-79-11
HGM2-BS02P-56-11	HGM2-BS03P-96-11	

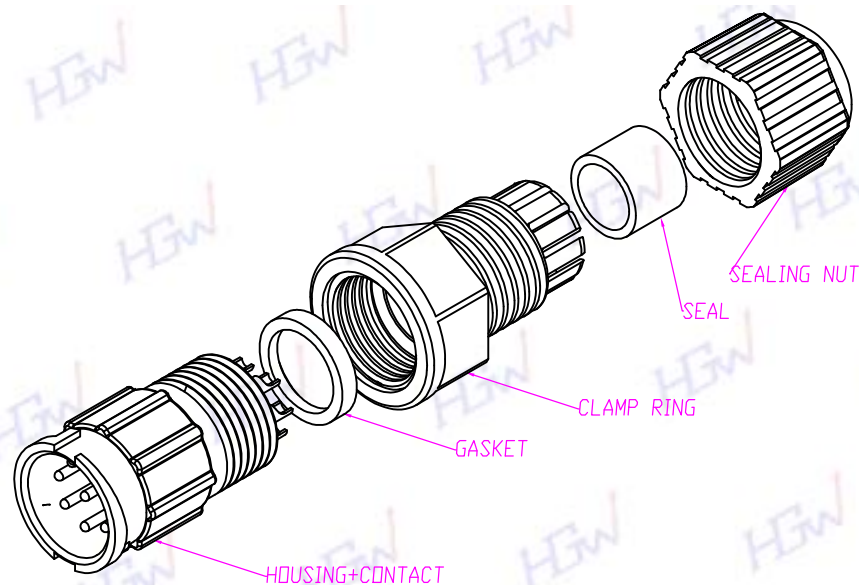

1.MATERIAL

1-1.HOUSING: PA66

1-2.CONTACT: BRASS

1-3.GASKET: SILICONE

1-4.CLAMP RING: PA66

1-5.SEAL: SILICONE

CABLE: OD ϕ 4.5mm~ ϕ 6.5mm

1-6.SEALING NUT: PA66

2.FINISH

2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION


3-1.RATED CURRENT: 5A

3-2.RATED VOLTAGE: 250V

3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

4-1.OPERATION TEMPERATURE: -40°C~105°C

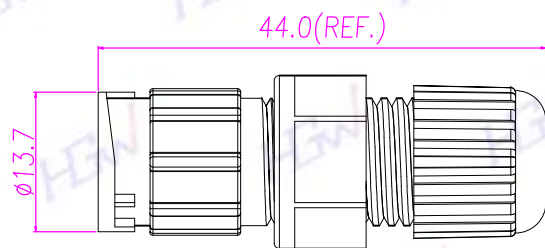

禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180720
B	料件修正	211214

客戶圖面確認簽回章

TITLE B SIZE(M)LOCK TYPE
ASSEMBLY

P/N: SEE TABLE A

DWG. NO: QC8640

DR. Dan UNIT:mm

CH. Jason SCALE 1:1

AP. Lanny
UNLESS OTHERWISE
SPECIFIED TOLERANCES:
REV. B SHEET 1/1
X ± 0.1 XXX ± 0.03
XX ± 0.05 ANGLE $\pm 1^\circ$