



TABLE A




2 PIN

HGM2-BS02P-51-11




3 PIN

HGM2-BS03P-86-11





4 PIN

HGM2-BS04P-156-11

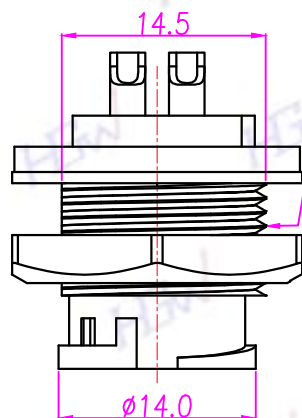

5/8'-27UNS



RECOMMENDED PANEL CUT-OUT

1.MATERIAL

- 1-1.HOUSING: PA66
- 1-2.CONTACT: BRASS
- 1-3.GASKET: SILICONE
- 1-4.HEX NUT: PA66

2.FINISH


- 2-1.CONTACT: GOLD FLASH PLATED

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 10A
- 3-2.RATED VOLTAGE: 250V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C

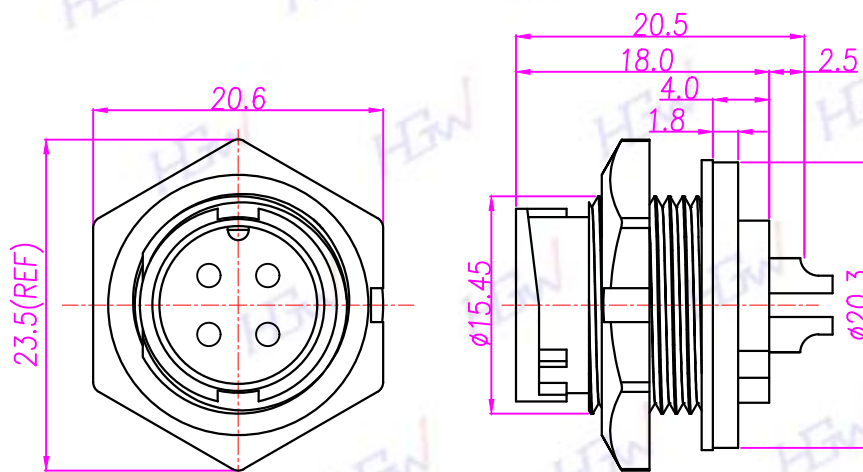

UNMATED IP67



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		180603

客戶圖面確認簽回章

TITLE
B SIZE(M)10A半牙前鎖焊線式

P/N: SEE TABLE A

DWG. NO: QC8428

DR. Dan		UNIT: mm
---------	--	----------

CH. Jason	SCALE	1:1
-----------	-------	-----

AP. Lanny		UNLESS OTHERWISE SPECIFIED TOLERANCES:	
REV. A	SHEET 1/1	X ± 0.20	XXX ± 0.05
		XX ± 0.10	ANGLE ± 1°