




HGF10-BS02P-CB90



HGF10-BS03P-CB90




HGF10-BS04P-CB90




HGF05-BS02P-CB90



HGF05-BS03P-CB90




HGF05-BS04P-CB90




HGF05-BS05P-CB90



HGF05-BS06P-CB90




HGF05-BS07P-CB90




HGF05-BS08P-CB90



HGF02-BS10P-CB90



HGF02-BS12P-CB90

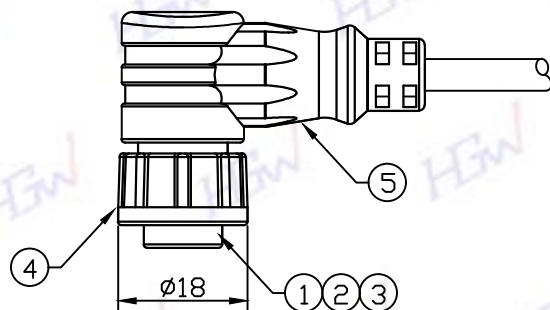

NOTES:

1.ELECTRICAL SPECIFICATION

1-1.RATED CURRENT: 10/5/2 A

1-2.RATED VOLTAGE: 250V

1-3.WATERPROOF: IP67

2.ENVIRONMENTAL

2-1.OPERATION TEMPERATURE: -20°~80°C

3.PART NUMBER SPECIFICATION

3-1.HGFxx-BSxxP-CB

02 - 02 PINS	07 - 07 PINS
03 - 03 PINS	08 - 08 PINS
04 - 04 PINS	10 - 10 PINS
05 - 05 PINS	12 - 12 PINS
06 - 06 PINS	

10-CURRENT RATING 10A
 05-CURRENT RATING 5A
 02-CURRENT RATING 2A

- 1.CONNECTOR: B SIZE FEMALE CONNECTOR ,for1
 2.CONTACT: BRASS,FEMALE PIN,GOLD FLASH ,forN
 3.LOCK NUT: PA66 ,for1
 4.O-RING: EPDM ,for1
 5.MOLDING: PVC ,for1



禾剛企業有限公司
 HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		220106

客 戶 簽 名 確 認 章

TITLE
 CIRCULAR B SIZE LOCK TYPE
 FEMALE 90° CABLE

P/N:

DWG. NO: HGFxx-BSxxP-CB90

DR. Dan



UNIT:mm

CH. Jason

SCALE

1:1

AP. Lanny

UNLESS OTHERWISE
SPECIFIED TOLERANCES:

REV.	SHEET	
A	1/1	X ± 0.20 XXX ± 0.05 XX ± 0.10 ANGLE ± 1°