





REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
AX1			9/08/2006	Joan


SPECIFICATION:
 1.MATERIAL:
 HOUSING: LCP(EASTMAN LG431-9731L)WITH 30% G/F UL94 V-0
 COLOR:BLACK
 CONTACT:BRASS C2680R EH,T=0.25mm
 BOARD LOCK:BRASS C2680R H,T=0.30mm
 2.FINISH:
 CONTACT:15u" GOLD/TIN PLATING ON CONTACT AREA
 100u" MIN. TIN-LEAD PLATING ON SOLDERTAILS
 50u" MIN.NICKEL UNDERPLATING OVER ALL
 BOARD LOCK:100u" MIN. TIN-LEAD PLATING ON SOLDERTAILS
 50u" MIN.NICKEL UNDERPLATING OVER ALL

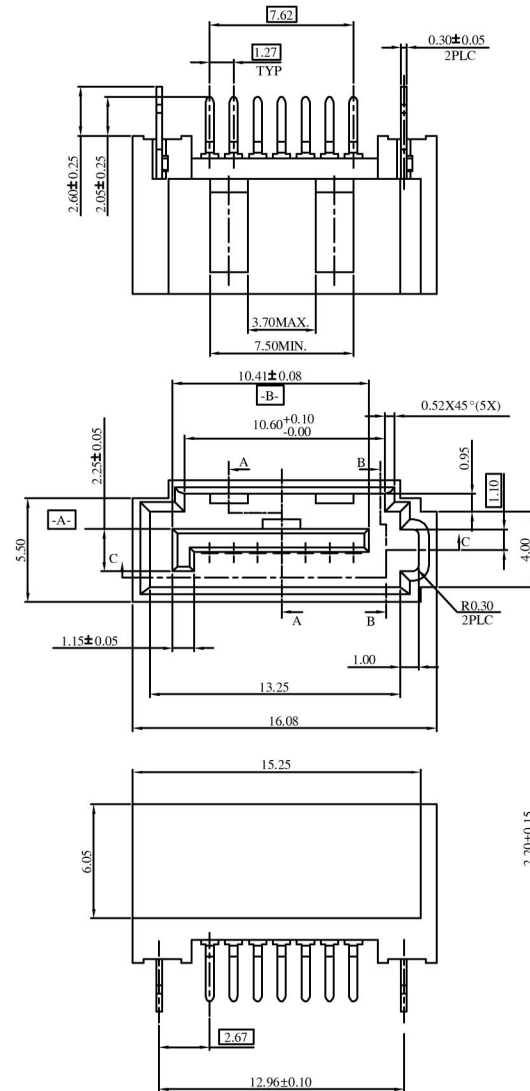


SECTION B-B

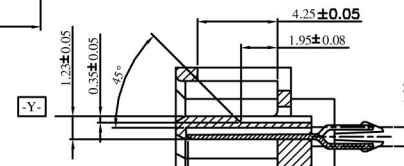

SECTION A-A

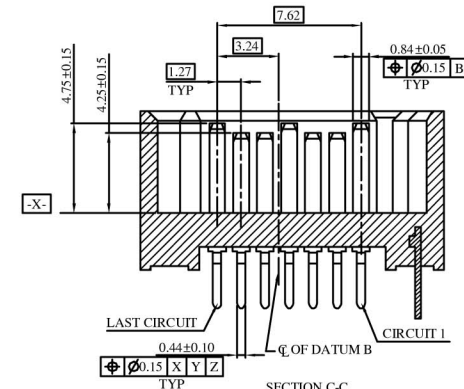

SECTION C-C

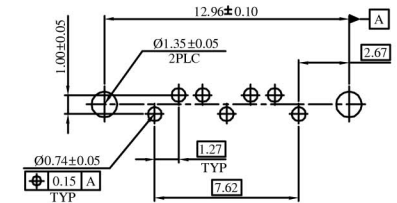

RECOMMEND PCB LAYOUT
PCB TOLERANCE: ±0.05



TOLERANCE UNIT(mm)		APPROVALS		DATE	TC&C Electronics Co.,Ltd			
X.	±0.38	DRAWN	Joan	9/08/2006	TITLE SATA 7P板端180度A型魚叉式開槽全包			
X.X	±0.25	CHECKED	Tank Lee	9/08/2006				
X.XX	±0.15	APPROVED	Johnson	9/08/2006	SCALE N.A.	PART NO.	DRAWING NO.	REV.
X.XXX	±0.08				SHEET 1 OF 1	T504873625210U4	SATA-1173C2A	AX0
ANGULAR	±2°				CUSTOMER CODE	CUSTOMER PART NO.		
UNLESS OTHERWISE SPECIFIED		UNIT MM						