

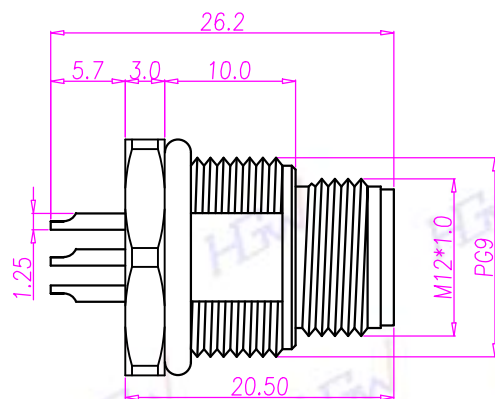



NUT



MALE

Pin Assignments
Front View



RECOMMEND PANEL CUT-OUT

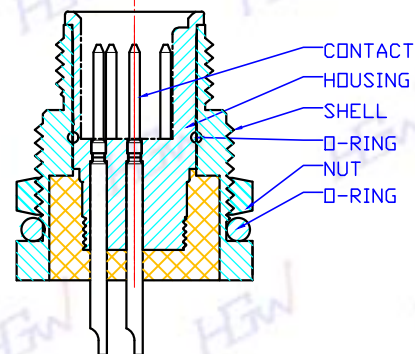


TABLE A

KEY	8PIN	KEY	8PIN	KEY	6PIN
HGM2-M1208P-36-11	HGM2-M1208P-125-11 HGM2-M1208P-136-11	HGM2-M1206P-85-11			
HGM2-M1208P-136-11	STAINLESS STEEL 316				
HGM2-M1206P-85-11	BRASS	NICKEL PLATED			
HGM2-M1208P-125-11	BRASS	NICKEL PLATED			
HGM2-M1208P-36-11	BRASS	NICKEL PLATED			
PART No.	MATERIAL(SHELL&NUT)	FINISH(SHELL&NUT)			

1.MATERIAL

- 1-1.HOUSING: PBT UL94V-0 ;COLOR: BLACK
- 1-2.CONTACT: BRASS
- 1-3.SHELL: SEE TABLE A
- 1-4.NUT: SEE TABLE A
- 1-5.O-RING: EPDM

2.FINISH

- 2-1.CONTACT: 10 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE: NICKEL
- 2-2.SHELL: SEE TABLE A
- 2-3.NUT: SEE TABLE A

3.ELECTRICAL SPECIFICATION

- 3-1.RATED CURRENT: 2A
- 3-2.RATED VOLTAGE: 30V
- 3-3.WATERPROOF: IP67

4.ENVIRONMENTAL

- 4-1.OPERATION TEMPERATURE: -40°C~105°C



禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		190103

客戶確認簽回章

TITLE
M12(M)前鎖焊線式(雙洗邊)(螺母雙導角)

P/N: SEE TABLE A

DWG. NO: QC6235

DR. Dan

CH. Jason

AP. Lanny

REV. A SHEET 1/1

UNLESS OTHERWISE
SPECIFIED TOLERANCES:
X $\pm$ 0.20 XXX $\pm$ 0.05
XX $\pm$ 0.10 ANGLE $\pm$ 1°