
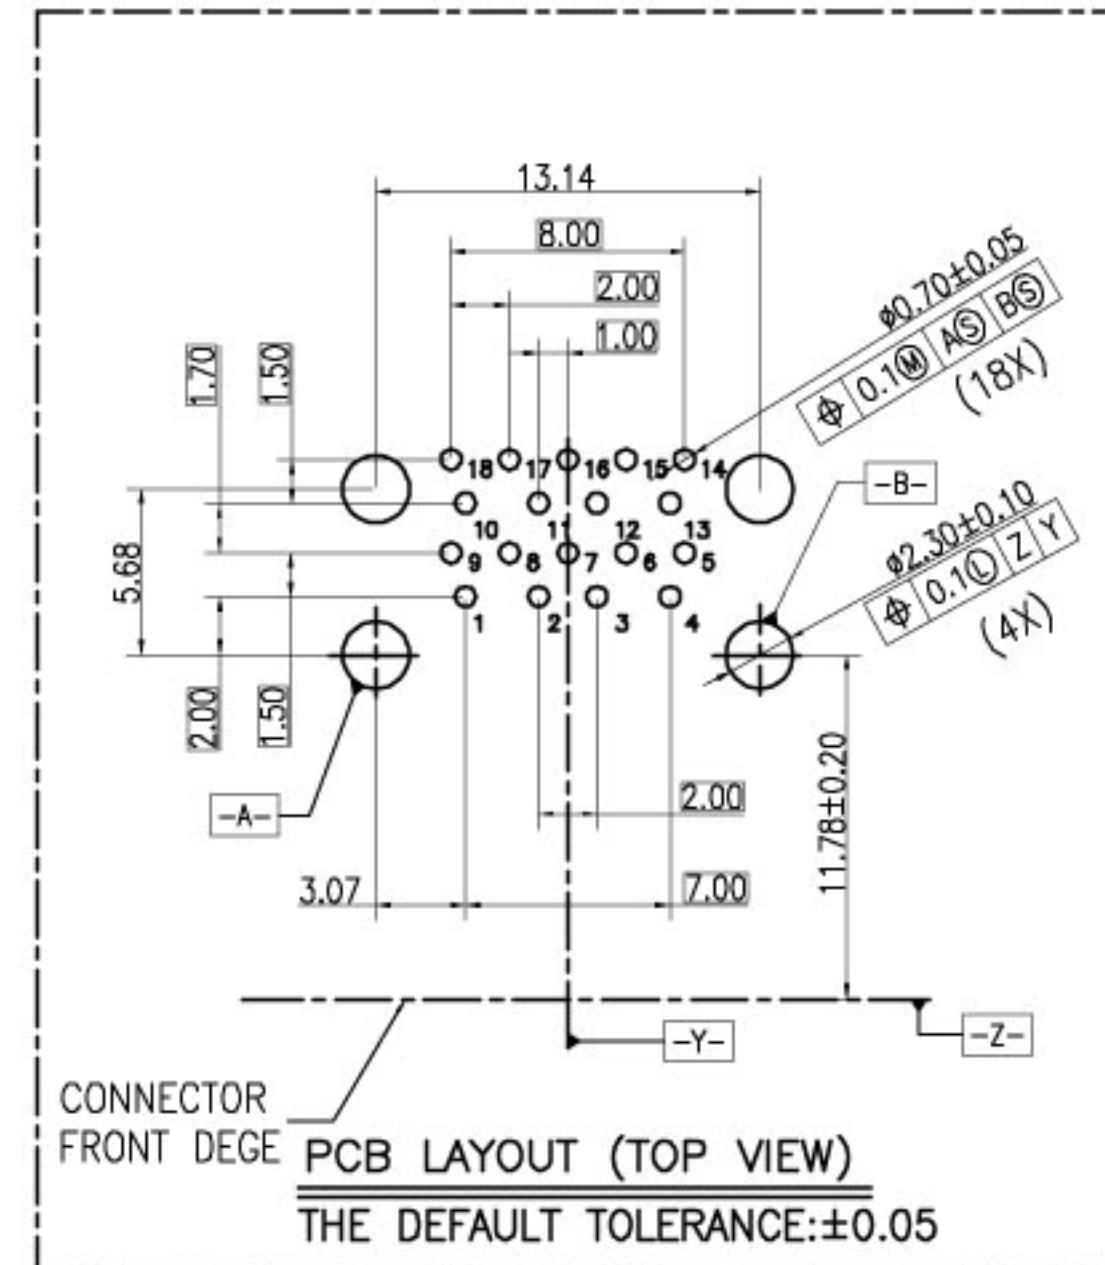
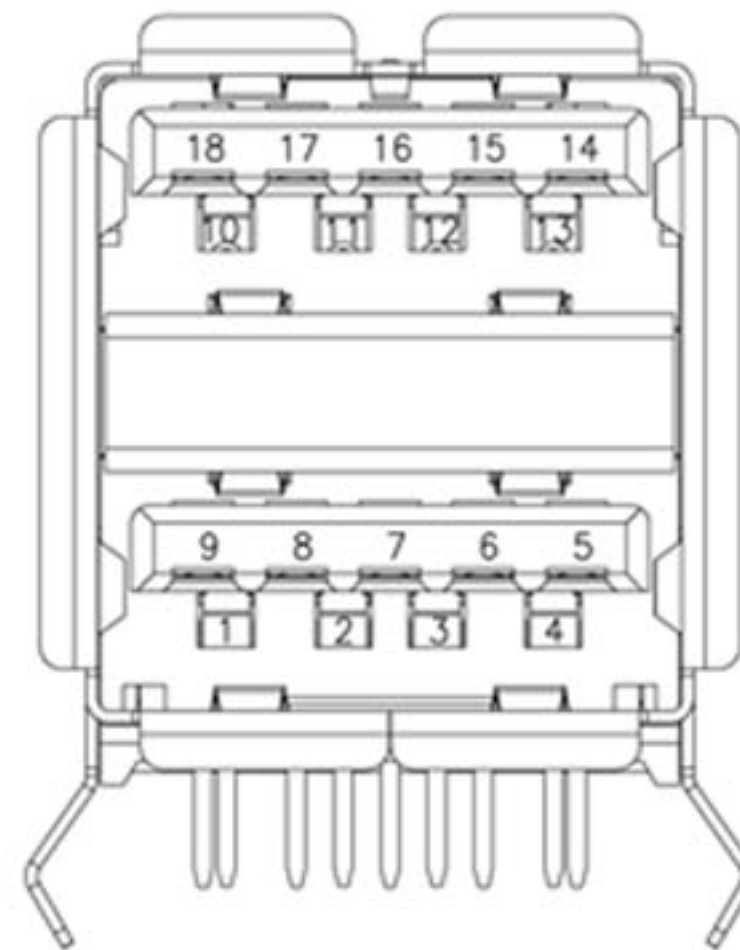


CUSTOMER DRAWING

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
AX1		NEW	06/03/2009	JOHNSON

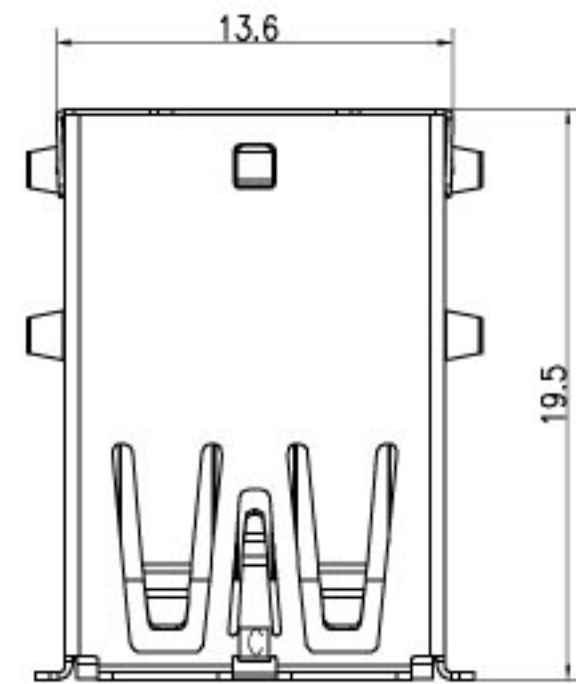

Pin Assignments

Pin Number	Signal Name	Pin Number	Signal Name
1/10	VBUS	5/14	SSRX-
2/11	D-	6/15	SSRX+
3/12	D+	7/16	GND
4/13	GND	8/17	SSTX-
Shell	Shield	9/18	SSTX+

NOTES:

1.MATERIAL:






- 1).HOUSING:HIGH TEMPERATURE THERMOPLASTIC.
- 2).CONTACT:COPPER ALLOY
- 3).FRONT SHELL:COPPER ALLOY
- 4).BACK SHELL&MIDDLE SHELL: STAINLESS STEEL

2.FINISH:

- 1).CONTACT:
50u" Ni MIN UNDER PLATED OVER ALL.
GOLD ON CONTACT AREA(SEE TABLE),
TIN 100u"MIN ON SOLDER AREA.
- 2).SHELL:
FRONT SHELL: TIN 100u" MIN SOLDER AREA.
UNDER 50u"NI MIN.

PART NUMBER SYSTEM: T50C832X1002XX

Gold Plating
0 = G/F
1 = 5u
2 = 10u
3 = 15u
4 = 30u

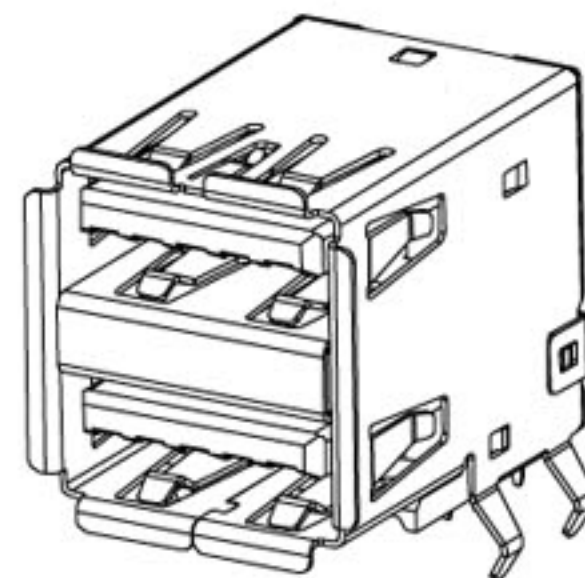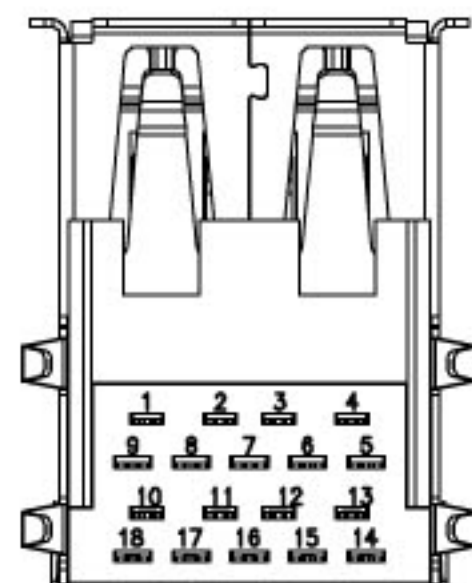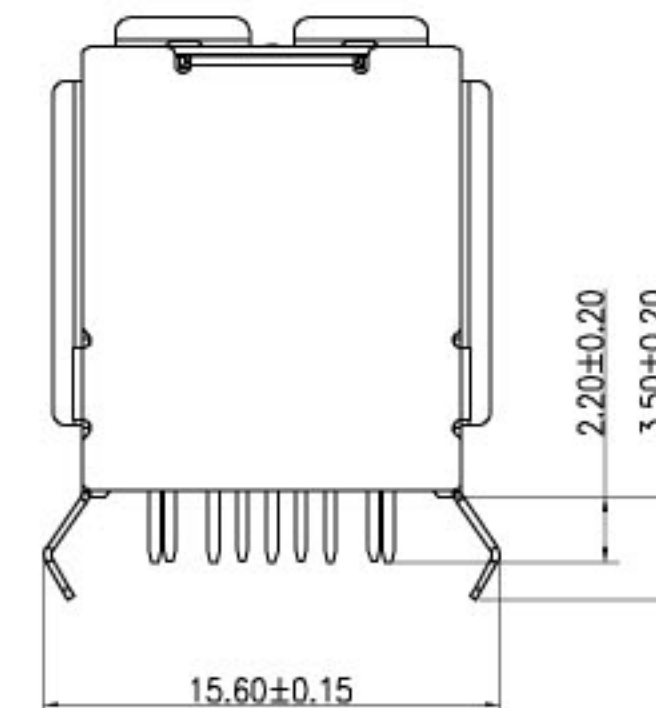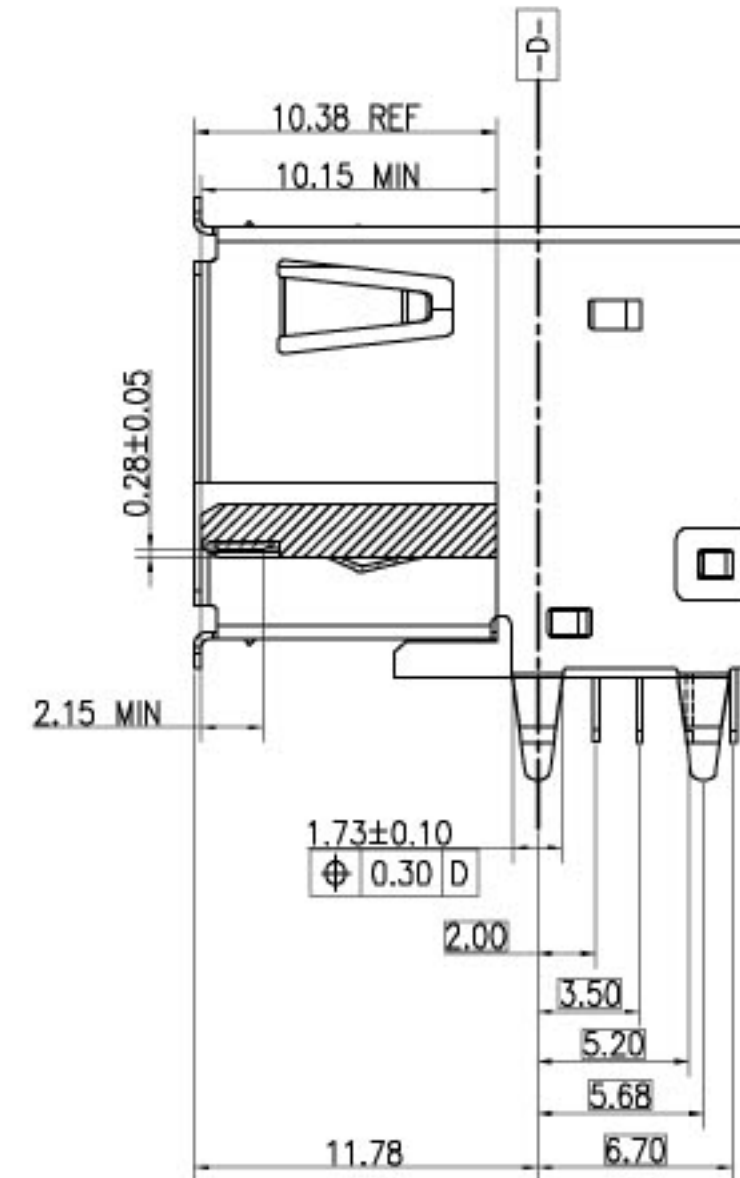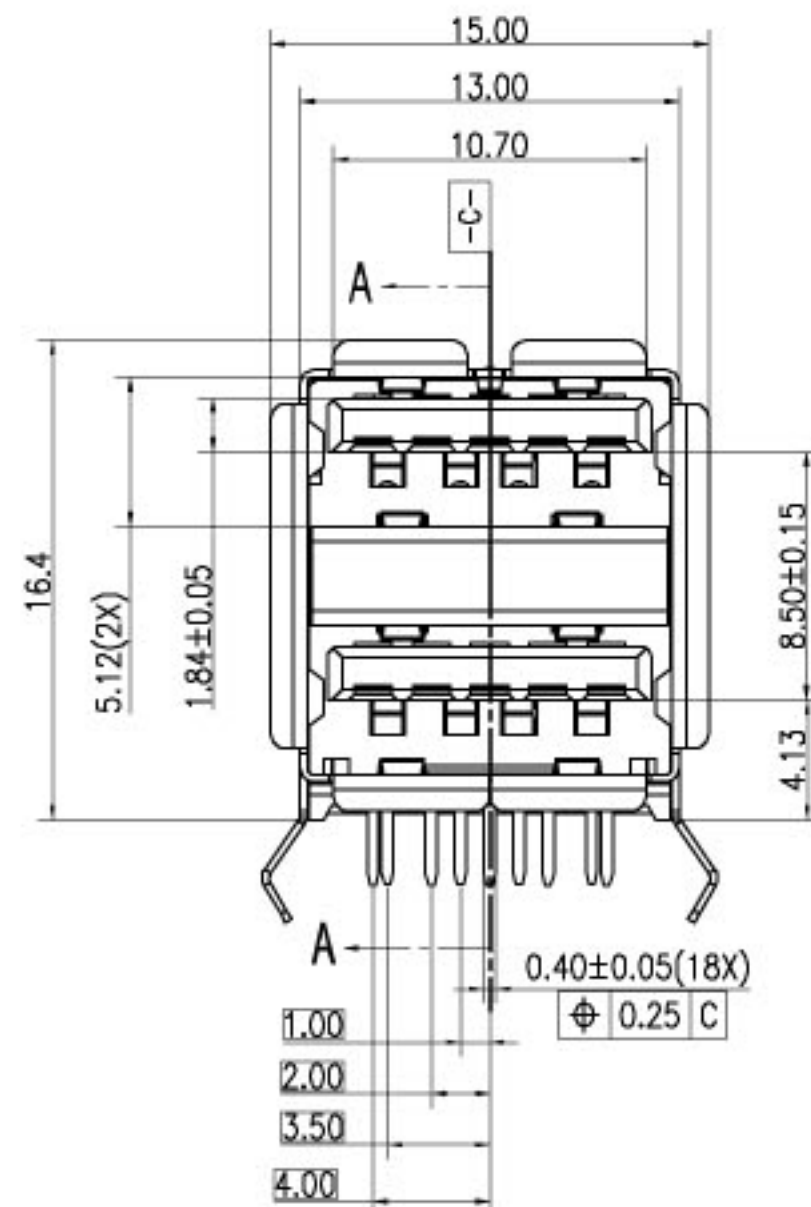

TOLERANCE UNIT(mm)	APPROVALS	DATE	TC&C Electronics Co.,Ltd			
X. ±0.30	DRAWN		TITLE DOUBLE USB 3.0 A TYPE CONNECTOR			
X.X ±0.25	GOLD	06/03/2009				
X.XX ±0.15	CHECKED					
X.XXX ±0.08	STONE	06/03/2009				
ANGULAR ±2°	APPROVED					
	JOHNSON	06/03/2009				
UNLESS OTHERWISE SPECIFIED	UNIT	MM	SCALE N.A.	PART NO.	DRAWING NO.	REV.
			SHEET 1 OF 1	T50C832X1002XX	T50C832X1002XX AX1	AX1
			CUSTOMER CODE	CUSTOMER PART NO.		