CUSTOMER DRAWING

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
AX1			9/08/2006	Joan

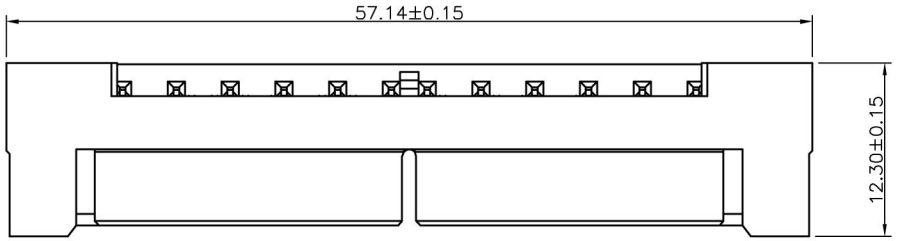

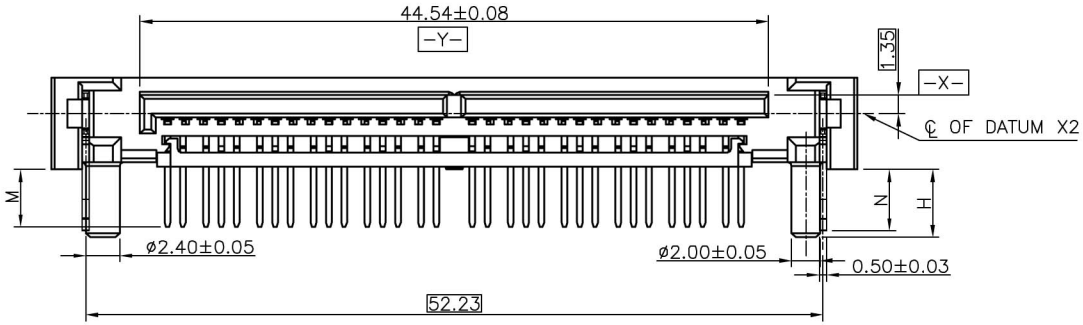



NOTES:
1.MATERIAL:
HOUSING:LCP(DuPont ZE16105)WITH 30% G/F UL94 V-0
COLOR:BLACK
COVER:LCP(DuPont ZE16105)WITH 30% G/F UL94 V-0
COLOR:BLACK
CONTACT:BRASS C2680 (T=0.30mm)
BOARD LOCK:PHOSPHOR BRONZE, C5191-H (T=0.50mm)
2.FINISH:
CONTACT:15u" GOLD/TIN PLATING ON CONTACT AREA
100u" MIN.LEAD-FREE (100%) TIN PLATING ON SOLDERTAILS
50u" MIN.NICKEL UNDERPLATING OVER ALL
BOARD LOCK:100u" MIN.LEAD-FREE (100%) TIN PLATING ON SOLDERTAILS
50u" MIN.NICKEL UNDERPLATING OVER ALL

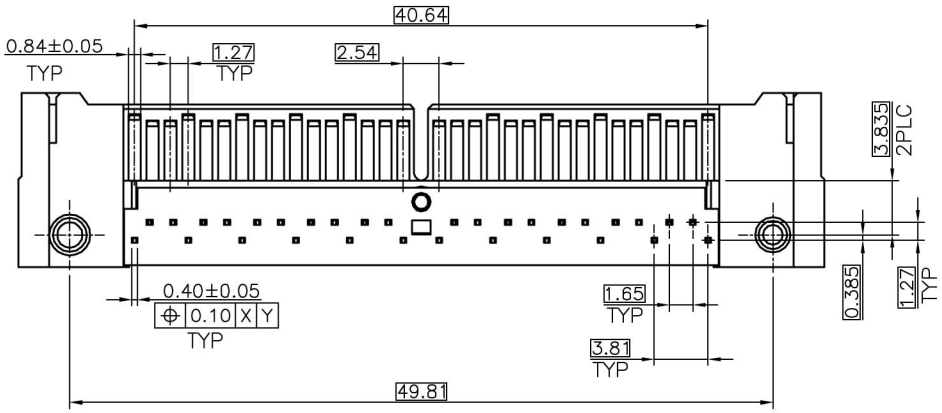

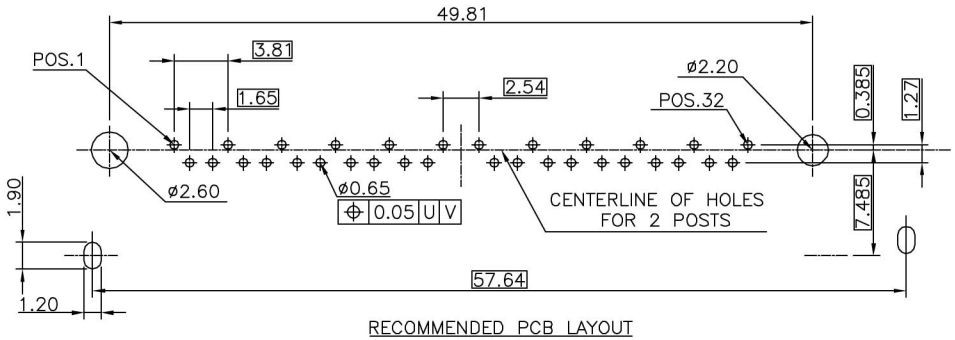

RECOMMENDED PCB LAYOUT
ALL TOLERANCES ARE±0.05

PART NO.	PCB THICKNESS	DIMENSION "M"	DIMENSION "N"	DIMENSION "H"
T5049B3253210U4	1.57±0.10	2.54±0.20	2.75±0.20	3.20±0.10
T5049B3263210U4	3.81±0.10	4.06±0.20	4.35±0.20	4.80±0.10

TOLERANCE UNIT(mm)		APPROVALS	DATE
X.	±0.30	DRAWN Joan	9/08/2006
X.X	±0.25	CHECKED Tank Lee	9/08/2006
X.XX	±0.15	APPROVED Johnson	9/08/2006
X.XXX	±0.08		
ANGULAR	±2°		
UNLESS OTHERWISE SPECIFIED		UNIT MM	

TC&C Electronics Co,.Ltd

TITLE
SAS 32P(MALE) RA DIP TYPE

SCALE N.A.	PART NO.	DRAWING NO.	REV.
SHEET 1 OF 1	SEE TABLE	SATA-1250C2A	AX1
CUSTOMER CODE		CUSTOMER PART NO.	