

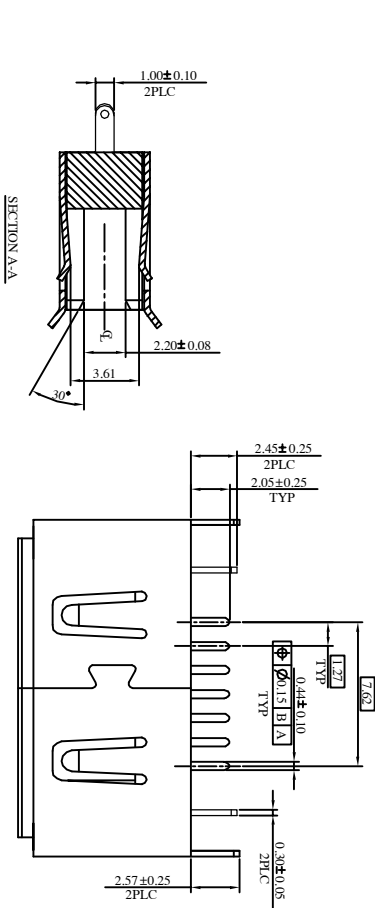
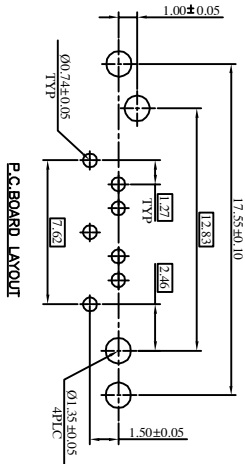
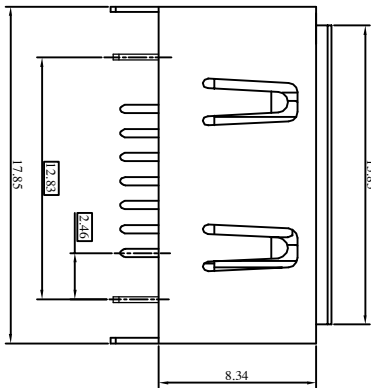



REVISIONS			
SYM	ECN No.	DESCRIPTION	DATE
AX1			9/08/2006
			Joan



SPECIFICATION:
 MATERIAL: LCP LG431-973IL 30 % G/F UL 94V-0
 HOUSING: LCP LG431-973IL 30 % G/F UL 94V-0
 COLOR: BLACK
 CONTACT: **BRASS C2680R** H-T=0.25mm
 PEG: BRASS C2680R HT=0.30mm
 SHELL: BRASS C2680R T=0.30mm
 FINISH: 15μ" GOLD/PTN PLATING ON CONTACT AREA
 CONTACT: 100μ" MIN. TIN-LEAD PLATING ON SOLDERTAILS
 50μ" MIN. NICKEL UNDERPLATING OVERALL
 PEG: 100μ" MIN. TIN-LEAD PLATING ON SOLDERTAILS
 50μ" MIN. NICKEL UNDERPLATING OVERALL
 SHELL: 100μ" MIN. TIN-LEAD PLATING ON SOLDERTAILS
 50μ" MIN. NICKEL UNDERPLATING OVERALL

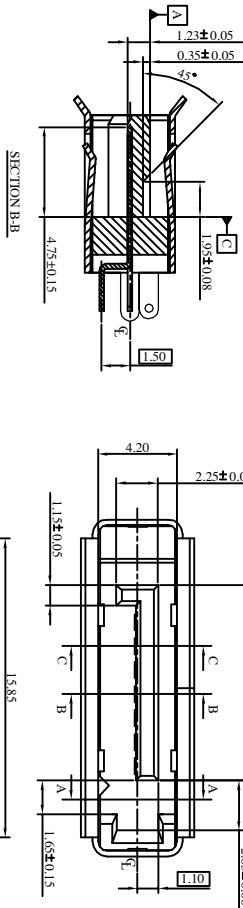

PC BOARD LAYOUT



TOLERANCE UNIT (mm)		APPROVALS		DATE		TITLE			
X	±0.38	DRAWN	Joan	9/08/2006		SATA 7P板端180度B型雙導槽加鐵殼			
XX	±0.25	CHECKED	Tank Lee	9/08/2006					
XXX	±0.15	APPROVED	Johnson	9/08/2006					
XXXX	±0.08								
ANGULAR ±2°						SCALE N.A.	PART NO.	DRAWING NO.	REV.
UNLESS OTHERWISE SPECIFIED						SHEET 1 OF 1	T508421125401U4	SATA-1118C2A	AX0
						CUSTOMER CODE	CUSTOMER PART NO.		